




Guarantee to  
optimum results



HOSPITALITY & PROFESSIONAL BAKERY



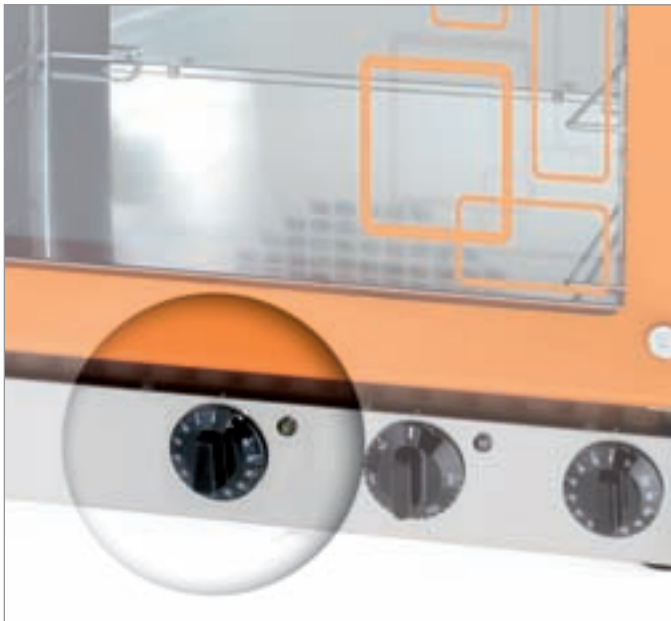

<b>RX-304</b>	Weight	34 kg
	Capacity	4 x 430 x 340 mm
	Distance between trays	80 mm
	Voltage	230 V~1N_ 50/60 hz
	Connection	Single - phase
	Electrical power	3.000 W
	Motor power	2 x 50 W
	Maximum temperature	250 °C

- Stainless Steel interior and exterior.
- Removable rack guides, for cleaning.
- Perforated aluminum trays included.
- Timer 0-120 sec. + infinite function.
- Removable door whit tempered double glazing.

**Options:** Grill (1,4kW) - Humidifier




**690,00 €**

<b>RX-424</b>	Weight	36 kg
	Capacity	4 x 480 x 340 mm
	Distance between trays	80 mm
	Voltage	230 V~1N_ 50/60 hz
	Connection	Single - phase
	Electrical power	3.000 W
	Motor power	2 x 50 W
	Maximum temperature	250 °C

- Stainless Steel interior and exterior.
- Baking chamber lights.
- Removable rack guides, for cleaning.
- Wire rack included.
- Timer 0-120 sec. + infinite function.
- Cycle end alarm.
- Removable door whit tempered double glazing.

**Options:** Grill (1,4kW) - Humidifier - Conversion kit to GN 2/3.

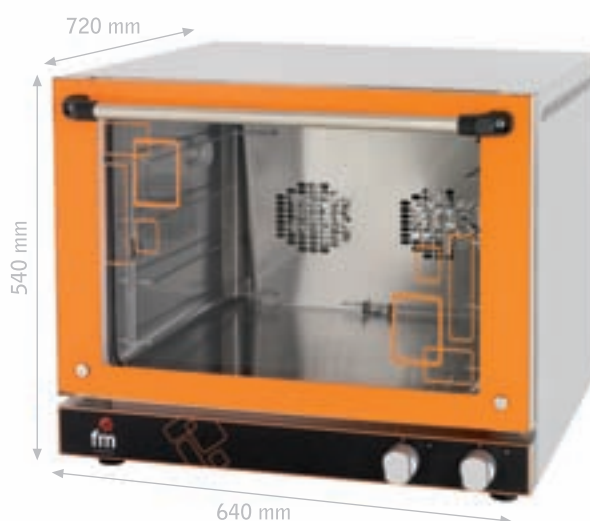


**885,00 €**

<b>RXL-424</b>	Weight	36 kg
	Capacity	4 x 480 x 340 mm
	Distance between trays	80 mm
	Voltage	230 V~1N_ 50/60 hz
	Connection	Single - phase
	Electrical power	3.000 W
	Motor power	2 x 50 W
	Maximum temperature	250 °C

- Stainless Steel interior and exterior.
- Baking chamber lights.
- Removable rack guides, for cleaning.
- Wire rack included.
- Timer 0-120 sec. + infinite function.
- Cycle end alarm.
- Removable door whit tempered double glazing.

**Options:** Grill (1,4kW) - Humidifier - Conversion kit to GN 2/3.

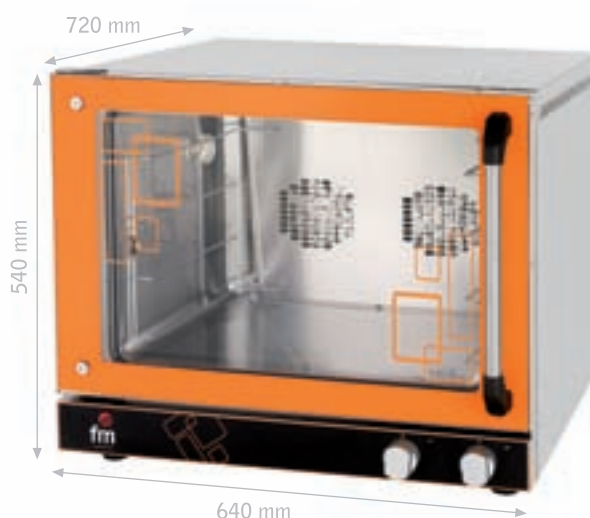

**935,00 €**




**1055,00 €**

<b>RX-484</b>	Weight	36 kg
	Capacity	4 x 480 x 340 mm
	Distance between trays	80 mm
	Voltage	230 V~1N_ 50/60 hz
	Connection	Single - phase
	Electrical power	3.500 W
	Motor power	1 x 150 W
	Maximum temperature	250 °C

- Stainless Steel interior and exterior.
- Removable rack guides, for cleaning.
- Wire rack included.
- Timer 0-120 sec. + infinite function.
- Cycle end alarm. · Magnetic door switch.
- Removable door whit tempered double glazing.
- Baking chamber lights.
- Safety thermostat.

**Options:** Grill (1,4kW) - Humidifier - Conversion kit to GN 2/3.

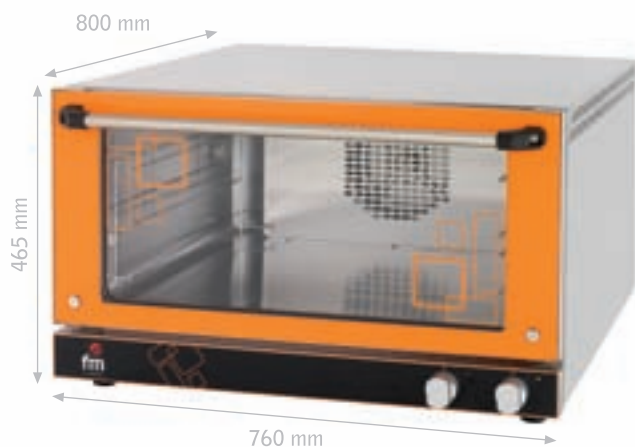


**1380,00 €**

<b>RX-603</b>	Weight	39 kg
	Capacity	3 x 600 x 400 mm
	Distance between trays	80 mm
	Voltage	230 V~1N_ 50/60 hz
	Connection	Single - phase
	Electrical power	3.700 W
	Motor power	1 x 150 W
	Maximum temperature	250 °C

- Stainless Steel interior and exterior.
- Removable rack guides, for cleaning.
- Wire rack included.
- Timer 0-120 sec. + infinite function.
- Cycle end alarm. · Magnetic door switch. · Reversing gear
- Removable door whit tempered double glazing.
- Baking chamber lights.
- Safety thermostat.

**Options:** Grill (2,2kW) - Humidifier - Conversion kit to GN 1/1.

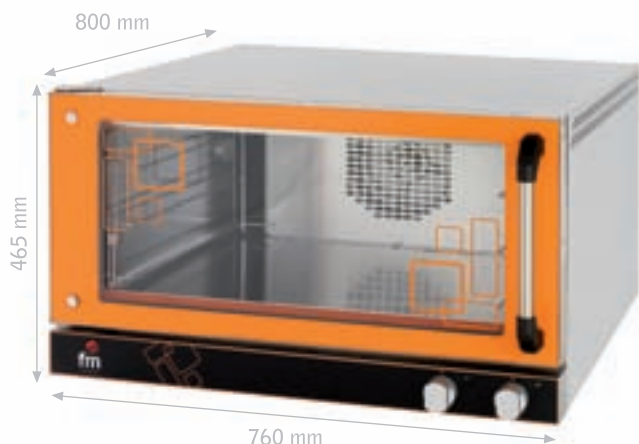

**1430,00 €**

<b>RXL-603</b>	Weight	39 kg
	Capacity	3 x 600 x 400 mm
	Distance between trays	80 mm
	Voltage	230 V~1N_ 50/60 hz
	Connection	Single - phase
	Electrical power	3.700 W
	Motor power	1 x 150 W
	Maximum temperature	250 °C

- Stainless Steel interior and exterior.
- Removable rack guides, for cleaning.
- Wire rack included.
- Timer 0-120 sec. + infinite function.
- Cycle end alarm. · Magnetic door switch. · Reversing gear
- Removable door whit tempered double glazing.
- Baking chamber lights.
- Safety thermostat.

**Options:** Grill (2,2kW) - Humidifier - Conversion kit to GN 1/1.





1510,00 €

<b>RX-604</b>	Weight	42 kg
	Capacity	4 x 600 x 400 mm
	Distance between trays	80 mm
	Voltage	400V~3N / 230V~1N_50/60 hz
	Connection	3 F+N+T2.5 mm2 three-phase
	Electrical power	5.500 W
	Motor power	1 x 150 W
	Maximum temperature	250 °C

- Stainless Steel interior and exterior.
- Removable rack guides, for cleaning.
- Wire rack included.
- Timer 0-120 sec. + infinite function.
- Cycle end alarm. · Magnetic door switch. · Reversing gear.
- Removable door whit tempered double glazing.
- Baking chamber lights.
- Safety thermostat.

**Options:** Grill (2,2kW) - Humidifier - Conversion kit to GN 1/1.



1715,00 €

<b>RX-604 PLUS</b>	Weight	48 kg
	Capacity	4 x 600 x 400 mm
	Distance between trays	80 mm
	Voltage	400V~3N / 230V~1N_50/60 hz
	Connection	3 F+N+T2.5 mm2 three-phase
	Electrical power	2 x 3.000 W
	Motor power	2 x 150 W
	Maximum temperature	250 °C

- Stainless Steel interior and exterior.
- Removable rack guides, for cleaning.
- Wire rack included.
- Timer 0-120 sec. + infinite function.
- Cycle end alarm. · Magnetic door switch. · Reversing gear.
- Removable door whit tempered double glazing.
- Baking chamber lights.
- Safety thermostat.

**Options:** Grill (2,2kW) - Humidifier - Conversion kit to GN 1/1.



1795,00 €

<b>RXL-604 PLUS</b>	Weight	48 kg
	Capacity	4 x 600 x 400 mm
	Distance between trays	80 mm
	Voltage	400V~3N / 230V~1N_50/60 hz
	Connection	3 F+N+T2.5 mm2 three-phase
	Electrical power	2 x 3.000 W
	Motor power	2 x 150 W
	Maximum temperature	250 °C

- Stainless Steel interior and exterior.
- Removable rack guides, for cleaning.
- Wire rack included.
- Timer 0-120 sec. + infinite function.
- Cycle end alarm. · Magnetic door switch. · Reversing gear.
- Removable door whit tempered double glazing.
- Baking chamber lights.
- Safety thermostat.

**Options:** Grill (2,2kW) - Humidifier - Conversion kit to GN 1/1.



**1455,00 €**

<b>RXE-603</b>	Weight	39 kg
	Capacity	3 x 600 x 400 mm
	Distance between trays	80 mm
	Voltage	230 V~1N_ 50/60 hz
	Connection	Single - phase
	Electrical power	3.700 W
	Motor power	1 x 150 W
	Maximum temperature	250 °C

- Stainless Steel interior and exterior.
- Removable rack guides, for cleaning.
- Wire rack included.
- LCD Display
- Cycle end alarm.
- Magnetic door switch.
- Reversing gear.
- Removable door whit tempered double glazing.
- Encoder control parameters – automatic mode.
- Baking chamber lights.
- Safety thermostat.

**Options:** Grill (2,2kW) - Humidifier - Conversion kit to GN 1/1.




**1795,00 €**

<b>RXE-604 PLUS</b>	Weight	48 kg
	Capacity	4 x 600 x 400 mm
	Distance between trays	80 mm
	Voltage	400V~3N / 230V~1N_ 50/60 hz
	Connection	3 F+N+T.2.5 mm2 three-phase
	Electrical power	2 x 3.000 W
	Motor power	2 x 150 W
	Maximum temperature	250 °C

- Stainless Steel interior and exterior.
- Removable rack guides, for cleaning.
- Wire rack included.
- LCD Display
- Cycle end alarm.
- Magnetic door switch.
- Reversing gear.
- Removable door whit tempered double glazing.
- Encoder control parameters – automatic mode.
- Baking chamber lights.
- Safety thermostat.

**Options:** Grill (2,2kW) - Humidifier - Conversion kit to GN 1/1.

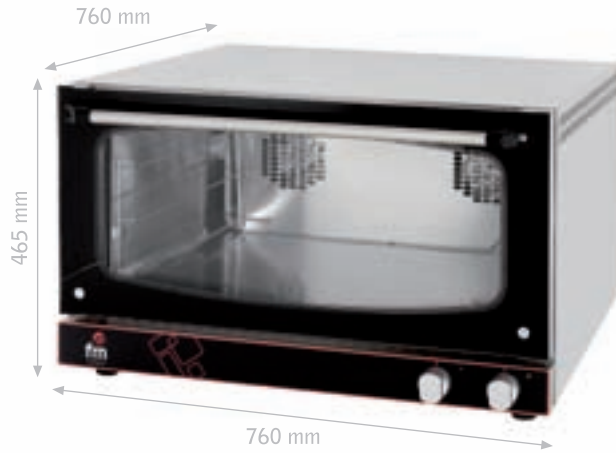

1220,00 €

<b>MP-603</b>	Weight	35 kg
	Capacity	3 x 600 x 400 mm
	Distance between trays	80 mm
	Voltage	230 V~1N_ 50/60 hz
	Connection	Single - phase
	Electrical power	3.200 W
	Motor power	2 x 50 W
	Maximum temperature	250 °C

- Stainless Steel interior and exterior.
- Removable rack guides, for cleaning.
- Wire rack included. · Safety thermostat.
- Timer 0-120 sec. + infinite function.
- Cycle end alarm. · Magnetic door switch. · Baking chamber lights.
- Removable door whit tempered double glazing.

**Options:** Grill (2,2kW) - Humidifier - Conversion kit to GN 1/1.



1285,00 €

<b>MP-604</b>	Weight	44 kg
	Capacity	4 x 600 x 400 mm
	Distance between trays	80 mm
	Voltage	230V~1N_ 50/60 hz
	Connection	Single - phase
	Electrical power	2 x 1.850 W
	Motor power	2 x 50 W
	Maximum temperature	250 °C

- Stainless Steel interior and exterior.
- Removable rack guides, for cleaning.
- Wire rack included. · Safety thermostat.
- Timer 0-120 sec. + infinite function.
- Cycle end alarm. · Magnetic door switch. · Baking chamber lights.
- Removable door whit tempered double glazing.

**Options:** Grill (2,2kW) - Humidifier - Conversion kit to GN 1/1.



1380,00 €

<b>MX-424</b>	Weight	36 kg
	Capacity	4 x 480 x 340 mm
	Distance between trays	80 mm
	Voltage	230V~1N_ 50/60 hz
	Connection	Single - phase
	Electrical power	3.000 W
	Motor power	2 x 50 W
	Maximum temperature	250 °C

- Stainless Steel interior and exterior.
- Removable rack guides, for cleaning.
- Wire rack included. · Safety thermostat.
- Timer 0-120 sec. + infinite function.
- Cycle end alarm. · Magnetic door switch.
- Baking chamber lights.
- Removable door whit tempered double glazing.

**Options:** Humidifier - Conversion kit to GN 2/3.

**Cooking Options::**

- ☒ Fan + circular element ☒ Fan + top and bottom heating element
- ☒ Fan + Grill 1 x 1.500 w ☒ Top Heating element (1 x 700 w) ☐
- ☐ Bottom heating element (1 x 1.400 w) ☐ Top heating element + Bottom heating element







**910,00 €**

<b>F-408</b>	Weight	32 kg
	Capacity	8 x 480 x 340 mm
	Distance between trays	80 mm
	Voltage	230 V~1N_ 50/60 hz
	Connection	Single - phase
	Electrical power	1 x 700 W
	Maximum temperature	85 °C

- Stainless Steel interior and exterior.
- Removable rack guides, for cleaning.
- Dry and wet heat control.
- Door whit tempered glass.



**1065,00 €**

<b>F-608</b>	Weight	42 kg
	Capacity	8 x 600 x 400 mm
	Distance between trays	80 mm
	Voltage	230 V~1N_ 50/60 hz
	Connection	Single - phase
	Electrical power	1 x 1.400 W
	Maximum temperature	85 °C

- Stainless Steel interior and exterior.
- Removable rack guides, for cleaning.
- Dry and wet heat control.
- Door whit tempered glass.





**3300,00 €**

<b>RXB-606</b> Weight	68 kg
Capacity	6 x 600 x 400 mm
Distance between trays	80 mm
Voltage	400V~3N_50/60 hz
Connection	3 F+N+T2.5 mm2 three-phase
Electrical power	10.000 W
Motor power	2 x 150 W
Maximum temperature	250 °C

- Conversion kit to GN 1/1.
- Stainless Steel interior and exterior.
- Baking chamber lights.
- Removable rack guides, for cleaning.
- Wire rack included.
- Safety thermostat.
- Timer 0-120 sec. + infinite function.
- Water connection 3/4.
- Cycle end alarm.
- Magnetic door switch.
- Reversing gear.
- Door whit tempered glass.
- Manual Humidifier.
- Removable interior glass for easy cleaning.



**3485,00 €**

<b>RXB-606-E</b> Weight	68 kg
Capacity	6 x 600 x 400 mm
Distance between trays	80 mm
Voltage	400V~3N_50/60 hz
Connection	3 F+N+T2.5 mm2 three-phase
Electrical power	10.000 W
Motor power	2 x 150 W
Maximum temperature	250 °C

- Conversion kit to GN 1/1.
- Stainless Steel interior and exterior.
- Baking chamber lights.
- Removable rack guides, for cleaning.
- Wire rack included.
- Safety thermostat.
- Water connection 3/4.
- Magnetic door switch.
- Reversing gear.
- Door whit tempered double glass.
- Removable interior glass for easy cleaning.
- Encoder control parameters – automatic mode.
- Relative humidity control 0 to 99 sec.
- LCD Display.
- Manual humidifier button.
- Alarms: end of cycle open door, and probe chamber.



**3980,00 €**

<b>RXB-610</b> Weight	82 kg
Capacity	10 x 600 x 400 mm
Distance between trays	80 mm
Voltage	400V~3N_50/60 hz
Connection	3 F+N+T2.5 mm2 three-phase
Electrical power	15.000 W
Motor power	3 x 150 W
Maximum temperature	250 °C

- Conversion kit to GN 1/1.
- Stainless Steel interior and exterior.
- Baking chamber lights.
- Removable rack guides, for cleaning.
- Wire rack included.
- Safety thermostat.
- Timer 0-120 sec. + infinite function.
- Water connection 3/4.
- Cycle end alarm.
- Magnetic door switch.
- Reversing gear.
- Door whit tempered glass.
- Manual Humidifier.
- Removable interior glass for easy cleaning.



**4135,00 €**

<b>RXB-610-E</b> Weight	82 kg
Capacity	10 x 600 x 400 mm
Distance between trays	80 mm
Voltage	400V~3N_50/60 hz
Connection	3 F+N+T2.5 mm2 three-phase
Electrical power	15.000 W
Motor power	3 x 150 W
Maximum temperature	250 °C

- Conversion kit to GN 1/1.
- Stainless Steel interior and exterior.
- Baking chamber lights.
- Removable rack guides, for cleaning.
- Wire rack included.
- Safety thermostat.
- Water connection 3/4.
- Magnetic door switch.
- Reversing gear.
- Door whit tempered double glass.
- Removable interior glass for easy cleaning.
- Encoder control parameters – automatic mode.
- Relative humidity control 0 to 99 sec.
- LCD Display.
- Manual humidifier button.
- Alarms: end of cycle open door, and probe chamber.



**3560,00 €**

<b>F-104</b>	Weight	45 kg
	Capacity	4 Badeiras 2/3 GN
	Distance between trays	63 mm
	Voltage	400V~3N / 230V~1N_50/60 hz
	Connection	3 F+N+T2.5 mm2 three-phase
	Electrical power	5.000 W
	Motor power	200 W
	Maximum temperature	270 °C

- Stainless Steel interior 304, (gloss), exterior satiny.
- Removable door whit tempered double glazing.
- Removable rack guides, for cleaning. · Magnetic door switch.
- Safety thermostat chamber and Boiler. · Reversing gear.
- Automatic preheating. · Fast cooling. · Core probe.
- **Cooking mode ΔT**
- Regeneration. · Convection. · Mixed convection. · Steam.
- Hand shower for cleaning.



**5265,00 €**

<b>F-106</b>	Weight	85 kg
	Capacity	6 Badeiras 1/1 GN
	Distance between trays	63 mm
	Voltage	400V~3N_50/60 hz
	Connection	3 F+N+T2.5 mm2 three-phase
	Electrical power	9.000 W
	Motor power	200 W
	Maximum temperature	270 °C

- Stainless Steel interior 304, (gloss), exterior satiny.
- Removable door whit tempered double glazing.
- Removable rack guides, for cleaning. · Magnetic door switch.
- Safety thermostat chamber and Boiler. · Reversing gear.
- Automatic preheating. · Fast cooling. · Core probe.
- **Cooking mode ΔT**
- Regeneration. · Convection. · Mixed convection. · Steam.
- Hand shower for cleaning.



**6760,00 €**

<b>F-110</b>	Weight	90 kg
	Capacity	10 Badeiras 1/1 GN
	Distance between trays	63 mm
	Voltage	400V~3N_50/60 hz
	Connection	3 F+N+T2.5 mm2 three-phase
	Electrical power	18.000 W
	Motor power	300 W
	Maximum temperature	270 °C

- Stainless Steel interior 304, (gloss), exterior satiny.
- Removable door whit tempered double glazing.
- Removable rack guides, for cleaning. · Magnetic door switch.
- Safety thermostat chamber and Boiler. · Reversing gear.
- Automatic preheating. · Fast cooling. · Core probe.
- **Cooking mode ΔT**
- Regeneration. · Convection. · Mixed convection. · Steam.
- Hand shower for cleaning.





**1145,00 €**

<b>TTH-3002</b> Weight	20 kg
Capacity	650 toast/hour
Voltage	230 V~1N_ 50/60 hz
Connection	Single - phase
Electrical power	3.100 W
Nominal power	2 x 1500 W
Adjustable speed	0-1,7 cm. / seg
Horizontal discharge	whit removable bottom tray
Cooking dimension	500x220x80 mm



**1090,00 €**

<b>TTV-2400</b> Weight	20 kg
Capacity	950 toast/hour
Voltage	230 V~1N_ 50/60 hz
Connection	Single - phase
Electrical power	2.900 W
Nominal power	2 x 1.400 W
Adjustable speed	0-1,7 cm. / seg
Horizontal discharge	removable
Cooking dimension	500x80x260 mm



**1350,00 €**

<b>TTV-4000</b> Weight	22 kg
Capacity	1200 toast/hour
Voltage	230 V~1N_ 50/60 hz 380 V~1N_ 50/60 hz
Connection	Single - phase
Electrical power	4.100 W
Nominal power	2 x 2.000 W
Adjustable speed	0-1,7 cm. / seg
Horizontal discharge	removable
Cooking dimension	570x80x360 mm







## Ovens stand/Table

Stainless steel  
Capacity for 8 trays  
(except Rxb 10, capacity 6 trays)

Ref.	Measures			Compatible series
	A	B	C	
RX 48/34	620	640	850	Rx 404/424/484
RX 60/40	750	700	850	Rx 603/604/604Plus, Rx E 603/604/604 Plus
RXB	765	815	660	Rxb 606/Rxb 610
F	870	740	660	F-106 / F-110

## Trays



Wire Rack. Measures : 480x340mm y 600x400 mm  
French-Bread Tray Measures: 600x400mm

## Trays



Perforated Aluminium Tray.  
Measures 430x340 mm and 480x340 mm and 600x400 mm  
Aluminium Tray.  
Measures 430x340 mm and 480x340 mm and 600x400 mm  
Stainless steel Tray.  
Measures 430x340 mm and 480x340 mm and 600x400 mm

OVENS	Weight (Kg)	Num. Trays	Distance	Connection	Electrical Power	Motor Power	Temperature	Double glass	Wire racks	Trays	Grill	Humidifier	Kit GN	Chamber lights	Sound card	Reversing gear	Door switch
RX-304	32	4	80	1	3	2×50	250	✓	×	✓	○	○	×	×	×	×	×
RX-424	36	4	80	1	3	2×50	250	✓	✓	○	○	○	○	✓	✓	×	✓
RXL-424	36	4	80	1	3	2×50	250	✓	✓	○	○	○	○	✓	✓	×	✓
RX-484	36	4	80	1	3.5	150	250	✓	✓	○	○	○	○	✓	✓	×	✓
RX-603	39	3	80	1	3.7	150	250	✓	✓	○	○	○	○	✓	✓	✓	✓
RXL-603	39	3	80	1	3.7	150	250	✓	✓	○	○	○	○	✓	✓	✓	✓
RX-604	42	4	80	1-3	5.5	150	250	✓	✓	○	○	○	○	✓	✓	✓	✓
RXL-604	42	4	80	1-3	5.5	150	250	✓	✓	○	○	○	○	✓	✓	✓	✓
RX-604-P	48	4	80	1-3	6	2×150	250	✓	✓	○	○	○	○	✓	✓	✓	✓
RXL-604-P	48	4	80	1-3	6	2×150	250	✓	✓	○	○	○	○	✓	✓	✓	✓
MP-603	35	3	80	1	3.2	2×50	250	✓	✓	○	○	○	○	✓	✓	×	✓
MP-604	44	4	80	1	3.7	2×50	250	✓	✓	○	○	○	○	✓	✓	×	✓
MX-424	36	4	80	1	3	2×50	250	✓	✓	○	✓	○	○	✓	✓	×	✓
RXB-606	68	6	80	3	10	2×150	250	✓	✓	○	×	✓	✓	✓	✓	✓	✓
RXB-606-E	68	6	80	3	10	2×150	250	✓	✓	○	×	✓	✓	✓	✓	✓	✓
RXB-610	82	10	80	3	15	3×150	250	✓	✓	○	×	✓	✓	✓	✓	✓	✓
RXB-610-E	82	10	80	3	15	3×150	250	✓	✓	○	×	✓	✓	✓	✓	✓	✓
F-104	45	4	63	1-3	5	200	270	✓	×	○	×	✓	✓	✓	✓	✓	✓
F-106	80	6	63	3	9	200	270	✓	×	○	×	✓	✓	✓	✓	×	✓
F-110	90	10	63	3	18	300	270	✓	×	○	×	✓	✓	✓	✓	×	✓

PROOFER	Weight (Kg)	Num. Trays	Distance	Connection	Electric Power	Temperature
F-408	42	8	80	1	1.4	85
F-408	32	8	80	1	0.7	85

TOASTER	Weight (Kg)	Connection	Electric Power	Maximum Capacity	Average speed (cm/sec)
TTH-3002	20	1	3	650	0-1.7
TTV-2400	20	1	2.8	950	0-1.7
TTV-4000	22	1	4	1250	0-1.7

Symbols:                      Included ✓                      No included ×                      Optional ○



14900 LUCENA (Córdoba)  
Apdo. de correos 98  
SPAIN

tfn. (0034) 957 501 101 / fax. (0034) 957 590 128  
e-mail: [fmindustrial@fmindustrial.es](mailto:fmindustrial@fmindustrial.es)

[www.fmindustrial.es](http://www.fmindustrial.es)